


## Pipe Cleaning

High traction nozzles, with interchangeable inserts, rear jets.



### Application

- 15° angle of inclination
- the egg shape allows an easy headway in pipes with bends.

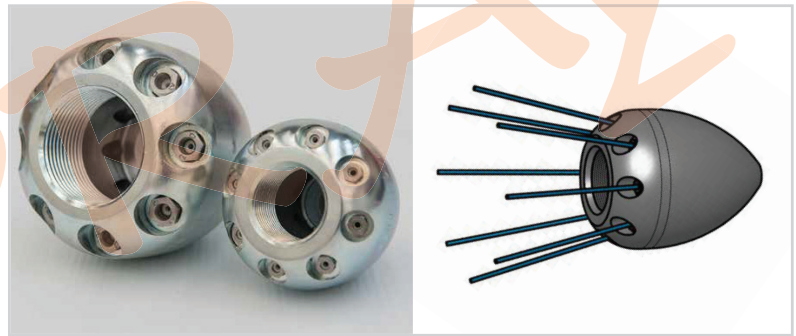

	1/4" F	3/8 " F	1/2" M	1/2" F,	3/4" F	1" F	1" 1/4 F
Ø x L (mm)	25 x 30	30 x 37	31 x 49	48 x 60	58 x 72	69 x 85	79 x 95
Weight (g)	50	100	100	300	0,8	1,3	2,0
Rear jet angle	15°	15°	35°	15°	15°	15°	15°
Inserts	-	-	6 x M6	6 x M6	8 x M6	8 x M6	M10 x 1
Flow (lt/min)	25-80	30-90	40-170	40-170	55-230	60-260	120-400
Max pressure (bar)	300	300	300	300	300	300	300
Working DN (mm)	30-80	60-120	60-200	60-200	100-250	150-350	150-400
#	5526.00	5527.001	5529.06	5528.06	5532.08	5533.08	5534.08
w/ceramic			5529.06C	5528.06C	5532.08C	5533.08C	5534.08C